



CITY OF SOUTH HAVEN

1199 8TH. Ave., South Haven, Michigan 49090
Telephone (269) 637-0737 * Fax (269) 637-4778

RIGHT OF WAY PERMIT APPLICATION

(Becomes a permit when signed by City Engineer)

For activity in city right of ways and public places.

This Application is for: _____ Phone: _____
Name - Please Print

Address: _____
Number and Street City State Zip

Date of Application: _____ Activity Dates: _____ to _____

Activity Address: Same or _____

Type of Activity: _____

New/Larger Curb Cut? Yes no Size of Cut/Excavation: _____
Before You Dig, Call Miss Dig 1-800-482-7171 to Locate Public Utilities.

Cut/Excavation By: _____ Phone: _____
Company

Company Address: _____
Number and Street City State Zip

Restoration By: _____ Phone: _____
Company


Company Address: _____
Number and Street City State Zip

Bond Amount: \$ _____ Date Bond Filed: _____
Fee Received: \$ _____ Deposit Received: \$ _____ Date: _____

City Approval: _____ Date: _____
City Engineer

Additional Information: _____

Location Sketch:

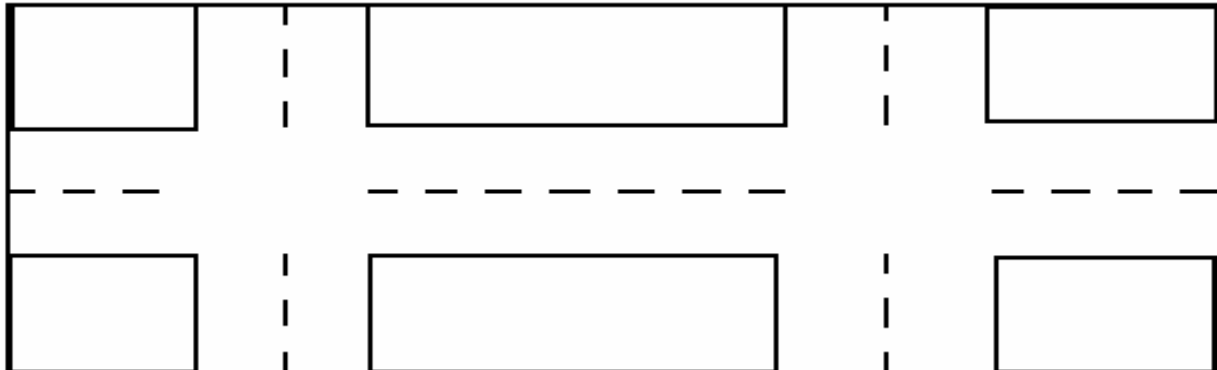

RIGHT OF WAY PERMIT
GENERAL CONDITIONS

DUMPTERS

- shall be made visible to motorists and pedestrians by means of reflectors or barricades.
- shall be placed within the Applicant's property lines extended into the street.
- shall not be placed within 15 feet of a fire hydrant.
- shall not be placed so as to block or impair traffic flow in the street or motorists' line of sight.
- shall be kept in safe condition at all times.
- shall be removed from the right of way in a timely manner.
- any damage to the public right of way shall be corrected by the Applicant or their contractor at their expense.

SIDEWALK SPECIFICATIONS

Material: Grade P2, P1, S3, S2 as specified in the 2003 MDOT Standard Specifications
Base material: Class II granular material compacted to 95% maximum density
Minimum thickness: 4" (6" when crossing a driveway)
Minimum width: 5' *
Control joint spacing: 5'
Expansion joint spacing: 20'
Maximum running slope: 1 in 20*
Maximum cross slope: 1 in 48*

*from the 1993 Michigan Barrier Free Design Graphics Manual

DRIVEWAY SPECIFICATIONS

That portion of driveways within the public right-of-way shall be paved with either:

- 6" thick non-reinforced Grade P1, HE, or S2 as specified in the 2003 MDOT Standard Specifications
- 4" thick wire reinforced Grade P1, HE, or S2 as specified in the 2003 MDOT Standard Specifications
- 2" thick asphalt

Minimum width at right-of-way line: 9'
Maximum width at right-of-way line: 16'
Maximum flare: 1.5 times the width at right-of-way line.

The above specifications shall not be interpreted as a complete list, please see applicable zoning and engineering requirements.